

INNOVATIVE

Model 5820 Ionizer Monitoring System - ECO



Specifications


Input Voltage	100 - 240 VAC
Output Voltage	24 VDC
Capacity	Up to 20 units of CoreStat® Ionizers
Compatibility	Model 3810 · Model 310 · Model 360 series
Display	LED
Alarm	Visual & Audio alarm operates high voltage failure, out of balance, unpowered status, and port detection
Cleaning	Auto-cleaning brush remote operation
Control	Monitoring enable or disable switch, auto-cleaning function
Monitoring	RJ-45 terminal
Operating Environment	Temperature: 15 - 35°C Humidity: 40 - 65% RH
Material	Powder coated aluminum enclosure
Dimensions (mm)	Model 5820 - 400W x 80H x 314D
Weight	Model 5820 - 2.4kg
Warranty	2 year limited warranty

Facility Monitoring System Output Signal



The Model 5820 can monitor Alarm Conditions by connecting devices such as a Signal Tower

Communication

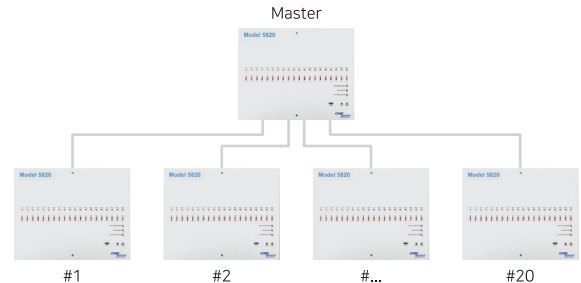

Daisy-chain connection of Model 5820 can up to 400 units of CoreStat® Ionizers

Alarm Monitoring

PORT DETECTING ALARM ● BALANCE ALARM ● HVP ALARM ● HV Power Alarm	PORT DETECTING ALARM ● BALANCE ALARM ● HVP ALARM ● Balance Alarm
PORT DETECTING ALARM ● BALANCE ALARM ● HVP ALARM ● Port Detecting	PORT DETECTING ALARM ● BALANCE ALARM ● HVP ALARM ● Un-powered

Size & Dimensions (mm)

